

Through-the-Wall "Micro" Heat Pump

STANDARD FEATURES



- 1,000 - 12,000 BTU/hr
- Heat/Cool/Dehumidify/Circulate
- DC Inverter Compressor
- Variable Speed Fan
- R32 Refrigerant
- 115/1/60 (V/Ph/Hz)
- 2.5 Pints/hr Dehumidification Capacity
- Silent Operation with "Quiet" Mode
- Self-Evaporative Function with Energy Saving Technology
- LED Operation Status Display
- On/Off Timer
- Remote Control
- WiFi Smart Life App
- 7.1" (180mm) Intake/Exhaust Hole Diameter
- 1-Year Parts and 3-Year Compressor Warranty



SPECIFICATIONS

		Units	MHP10
Cooling	Capacity Range	BTU/hr	1000-12000
	Efficiency Range	EER (BTU/W)	5-13
	Ambient Temp Range	°F (°C)	23-110 (-5-43)
Heating	Capacity Range	BTU/hr	1000-12000
	Efficiency Range	COP (W/W)	1.76-4.69
	Ambient Temp Range	°F (°C)	5 - 110 (-15 - 43)
Electrical	Power	V/Ph/Hz	115/1/60
	Fan Motor Exhaust	A	0.7
	Fan Motor Supply	A	0.15
	Compressor Motor	A	4.9
Refrigerant	Type		R32
	Factory Charge	lbs. (kg)	0.55 (0.25)
Fan	Quantity		1
	Power Input	W	25
	Type		Variable
	High Speed (Heat/Cool)	CFM	282/311
	Medium Speed (Heat/Cool)	CFM	247/277
Sound (@3meters)	Maximum	dBA	46
	Type		Inverter
Compressor	Speed Range	Hz	30-80
	Brand		GMCC
	Quantity		1
	Net Dimensions (D x W x H)	inch (mm)	8 x 40 x 23 (205 x 1000 x 585)
Dimensions	Shipping Dimensions (D x W x H)	inch (mm)	13 x 44 x 26 (330 x 1118 x 660)
	Net Weight	lbs. (kg)	94 (43)
	Shipping Weight	lbs. (kg)	107 (49)

DIMENSIONS

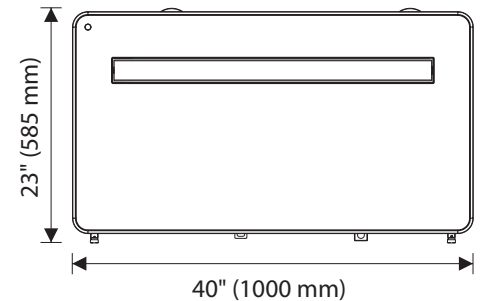

 260 North Elm St., Westfield, MA 01085
 (413) 564-5545

 7555 Tranmere Drive, Mississauga, ONT. L5S 1L4 Canada
 (905) 670-5888

www.designlinevac.com

PROJECT: _____ DATE: _____

LOCATION: _____

CUSTOMER: _____

ENGINEER: _____


SUBMITTED BY: _____

 FOR: Reference Approval Construction

UNIT DESIGNATION: _____

SCHEDULE NUMBER: _____

HEATING PERFORMANCE MHP10

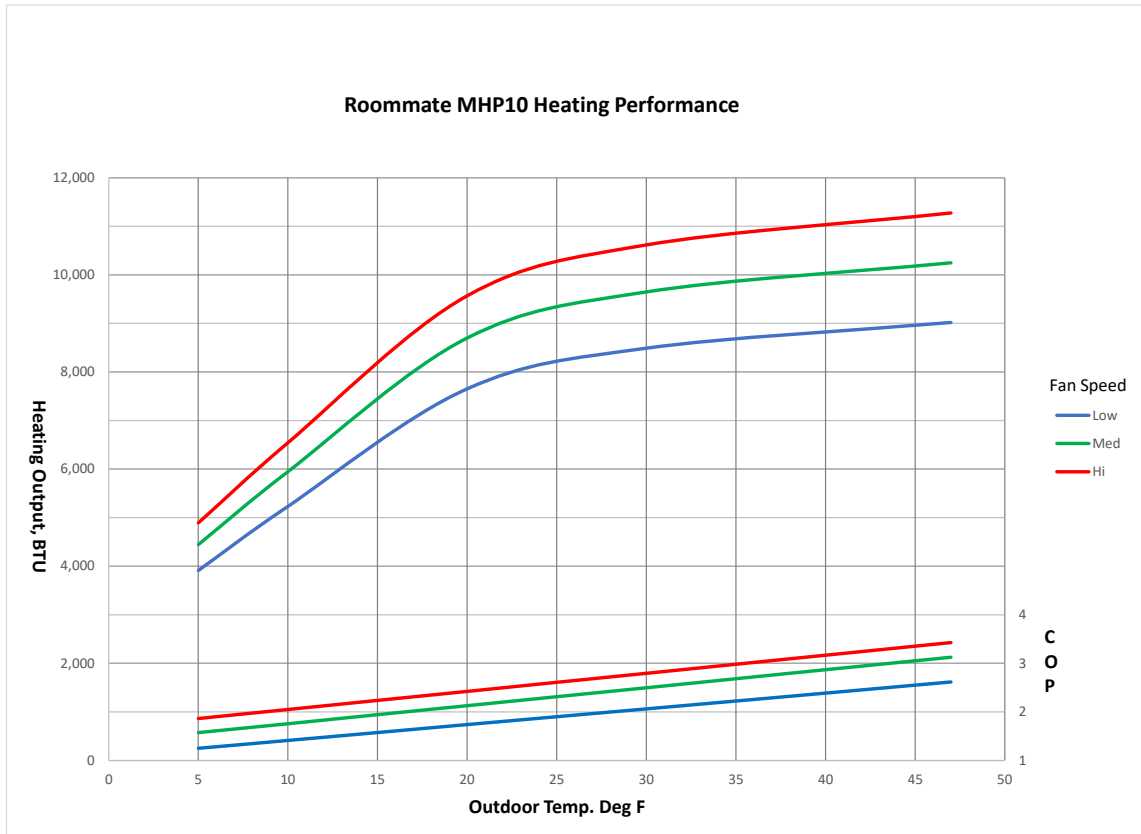

COOLING PERFORMANCE MHP10

